

# HYDRAULIC Wall-breakers


## for prefab and cast-in-situ concrete walls



- Little digging due to small dimensions and low cut of level.
- Environmental safe, no noise, no vibrations.
- The reinforcement remains fully intact.
- perfect horizontal concrete fracture between the chisels.
- No cracks below cut off level.
- Operation and maintenance are very easy and don't require special skills.
- Low operate costs, high efficiency

Model	Wall thickness (cm)	Pressure (bars)	Flow (l/min)	Machine weight (kg)	Excavator weight (tons)
Type 45	35-45cm	350	20	600	12
Type 80	60 – 80 cm	350	40	1500	20
Type 100	80 – 100 cm	350	60	2600	30


The product range of our wall-breakers is based on the various wall types, wall thickness and reinforcement. Due to the diversity of foundation techniques world wide and the modular concept of the wall-breaker, we can also configure the breaker to suit not standard designs. The latest technology makes it possible to break all prefab and cast-in-situ walls. Please contact us for more details.

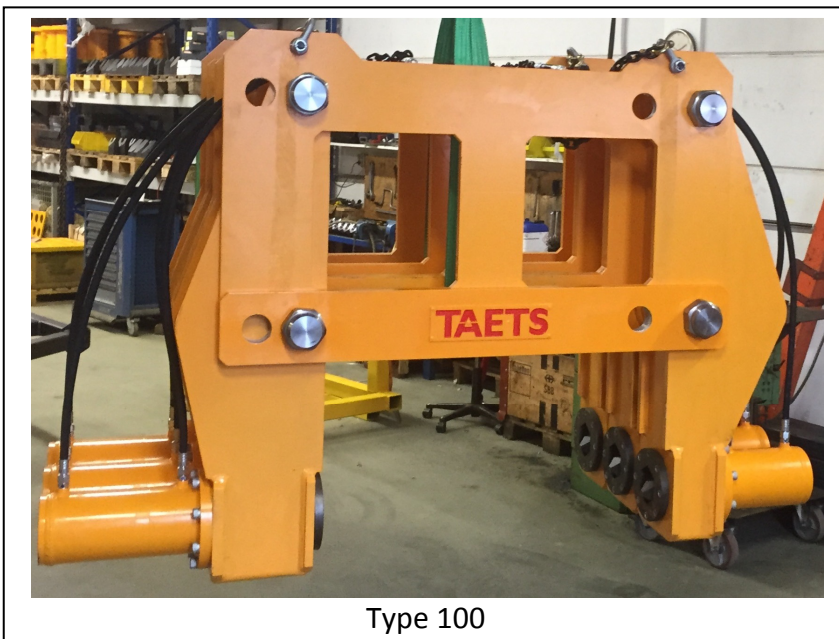

Manufactured by:



Distributed by:



P.O. Box 139  
 2240 AC Wassenaar  
 The Netherlands  
 Phone + 31 70 5112191  
 E-Mail: taets@taets.nl  
[www.pilebreaker.com](http://www.pilebreaker.com)